


WIELTON GROUP



TWO-AXLE CLASSIC TRAILERS

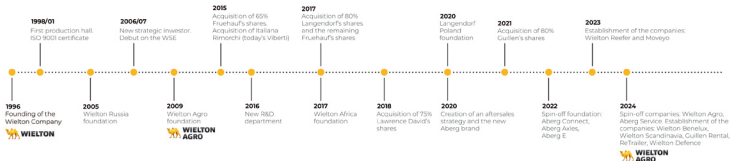

TYPES AVAILABLE:

- PRS-2/W8
- PRS-2/W12
- PRS-2/W10
- PRS-2/W14

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- UNIQUE SIDE SEALING SYSTEM
- DRAWBAR DESIGN FOR EASY TRAILER MANEUVERABILITY
- REINFORCED SIDE LOCKS
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY

*TECHNICAL DATA:



Type	PRS-2/W8	PRS-2/W12	PRS-2/W10	PRS-2/W14
Unladen weight [kg]	3100	3500	4400	4500
Administrative payload [kg]	8000	10000	12000	13000
Number of axles	2	2	2	2
Tire size	315/80R22.5	385/60R22.5	385/60R22.5	385/60R22.5
Internal body length [mm]	4000	4500	4500	5200
Total length [mm]	6760	6760	6760	7470
Internal body width [mm]	2430	2430	2430	2430
Total width [mm]	2550	2550	2550	2550
Platform height [mm]	1210	1330	1320	1410
Internal body height [mm]	200+200	800+800	800+800	800+800
Total height [mm]	2210	2560	2770	2820
Wheelbase [mm]	1810	1800	1800	2010
Maximum speed [km/h]	40	40	40	40
Capacity [m3]	11	13,2	15,4	18

* Technical data provided for the standard version with a tolerance of +/- 3%

PARTNERS:



for more information visit: www.wieltonagro.com.pl

TANDEM TRAILERS



TYPES AVAILABLE:

- PRC-2/W8
- PRC-2/W10
- PRC-2/W12
- PRC-2/W14

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- UNIQUE SIDE SEALING SYSTEM
- PNEUMATIC, HYDRAULIC, ELECTRICAL OUTLETS FOR SECOND TRAILER
- REINFORCED SIDE LOCKS
- SPRUNG DRAWBAR TYPE PRC-2/W14
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY



***TECHNICAL DATA:**



Type	PMO-0.70/3	PMO-0.70/10	PMO-0.70/15	PMO-0.70/14
Unladen weight [kg]	3200	4000	4500	4700
Administrative payload [kg]	4000	10000	13000	14000
Number of axles	2	3	3	3
Tire size	215-50R22.5	285-50R22.5	285-50R22.5	285-50R22.5
Internal body length [mm]	4360	6080	4560	5260
Total length [mm]	6300	6670	6670	7320
Internal body width [mm]	2420	2420	2420	2420
Total width [mm]	2550	2550	2550	2550
Platform height [mm]	1170	1230	1230	1410
Internal body height [mm]	2000-2100	600-600	600-600	600-600
Total height [mm]	2710	2980	2770	2620
Wheelbase [mm]	1670	1900	1900	2020
Maximum speed [km/h]	60	60	60	60
Capacity [m ³]	10	12.2	14	19

^a Technical data provided for the standard version with a tolerance of 4–7.3%.

PARTNERS



for more information visit: www.wieltonagro.com.pl

TWO-AXLE CLASSIC TRAILERS/TANDEM TRAILERS DOOR SIDE OPENING SYSTEM



TYPES AVAILABLE:

TURNTABLE:

- PRS-2/W14DP (SANDWICH PANEL)
- PRS-2/W14DS (PLYWOOD)

TANDEM:

- PRC-2/W14DP (SANDWICH PANEL)
- PRC-2/W14DS (PLYWOOD)

STRONG POINTS

- » STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- » STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- » REINFORCED TRAILER FRONT MADE OF SHEET METAL
- » PNEUMATIC, HYDRAULIC, ELECTRICAL OUTLETS FOR SECOND TRAILER
- » SANDWICH PANEL 25MM/ PLYWOOD 18MM
- » VERSATILITY AND WORK EFFICIENCY
- » BRANDED COMPONENTS
- » NEW TYRES
- » 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PRS-2/W14DP	PRS-2/W14DS	PRC-2/W14DP	PRC-2/W14DS
Unladen weight (kg)	4200	4200	4200	4200
Administrative payload (kg)	12000	12000	14000	14000
Number of axles	2	2	2	2
Tire size	385/650R15.5	385/650R15.5	385/650R15.5	385/650R15.5
Internal body length (mm)	3200	3200	3200	3200
Total length (mm)	1470	1470	1470	1470
Internal body width (mm)	2420	2420	2420	2420
Total width (mm)	2550	2550	2550	2550
Platform height (mm)	1420	1420	1420	1420
Internal body height (mm)	1800	1800	1800	1800
Total height (mm)	2630	2630	2630	2630
Wheelbase (mm)	2020	2020	2020	2020
Maximum speed (km/h)	40	40	40	40
Capacity (m3)	18	18	18	18

* Technical data provided for the standard version with a tolerance of +/- 3%

for more information visit: www.wieltonagro.com.pl

TWO-AXLE LONG TRAILERS



TYPES AVAILABLE:

- PRS-2/W9L
- PRS-2/W12L

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- DRAWBAR DESIGN FOR EASY TRAILER MANEUVERABILITY
- UNIQUE SIDE SEALING SYSTEM
- REINFORCED SIDE LOCKS
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY



*TECHNICAL DATA:



Type	PRS-2/W9L	PRS-2/W12L
Unladen weight (kg)	3400	4400
Administrative payload (kg)	9000	10000
Number of axles	2	2
Tire size	315/80R22.5	385/80R22.5
Internal body length (mm)	5200	5200
Total length (mm)	7540	7540
Internal body width (mm)	2400	2400
Total width (mm)	2500	2500
Platform height (mm)	1210	1300
Internal body height (mm)	590-690	690-690
Total height (mm)	2290	2370
Wheelbase (mm)	1870	1900
Maximum speed (km/h)	48	48
Capacity (m³)	12.8	15.3

* Technical data provided for the standard version with a tolerance of +/- 3%

PARTNERS:



for more information visit: www.wieltonagro.com.pl

THREE-AXLE CLASSIC TRAILER



TYPES AVAILABLE:

- PRS-3/W19

TYPES AVAILABLE:

- » STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- » STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- » DRAWBAR DESIGN FOR EASY TRAILER MANEUVERABILITY
- » AUTOMATIC PARKING BRAKE INTEGRATED AS STANDARD
- » INNOVATIVE BOARD OPENING SYSTEM
- » WIDE WORKING PLATFORM
- » BRANDED COMPONENTS
- » NEW TYRES
- » 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:

Type	PRS-3/W19
Unladen weight [kg]	6900
Administrative payload [kg]	11100
Number of axles	3
Tire size	385/60R22.5
Internal body length [mm]	7300
Total length [mm]	9090
Internal body width [mm]	2420
Total width [mm]	2450
Platform height [mm]	1470
Internal body height [mm]	800+800
Total height [mm]	2890
Wheelbase [mm]	3080
Maximum speed [km/h]	48
Capacity [m3]	25.5

* Technical data provided for the standard version with a tolerance of +/- 3%



for more information visit: www.wieltonagro.com.pl

BALE PLATFORMS 2S



TYPES AVAILABLE:

TURNTABLE:

- PRS-25/S9
- PRS-25/S12
- PRS-25/S12S (SIDE PROTECTION)

TANDEM:

- PRC-25/S9
- PRC-25/S9S (SIDE PROTECTION)
- PRC-25/S12
- PRC-25/S12S (SIDE PROTECTION)

STRONG POINTS:

- » STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- » STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- » FLOOR EDGE SLOTS FOR BELT ATTACHMENT
- » SPIRAL CABLE WITH A SOCKET LOCATED ON THE DRAWBAR
- » TOOL BOX
- » ABILITY TO MOUNT GALVANIZED POLES
- » ANTI-BICYCLE BUMPERS
- » LED LIGHTING, WALLS BLOCKADE, FERRY HANDLES
- » BRANDED COMPONENTS, NEW TYRES
- » 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PRS-25/S9	PRS-25/S12	PRS-25/S12S	PRC-25/S9	PRC-25/S9S	PRC-25/S12	PRC-25/S12S
Unladen weight (kg)	3000	4000	4000	4000	4100	4100	4100
Administrative payload (kg)	9000	12000	11000	9000	9000	12000	12000
Number of axles	2	2	2	2	2	2	2
Tire size	500/90-17	445/50R16.5	445/50R16.5	500/90-17	500/90-17	500/90-17	500/90-17
Internal body length (mm)	7840	7840	7840	7840	7840	7840	7840
Total length (mm)	10400	10400	10400	10400	10400	10400	10400
Internal body width (mm)	2420	2420	2420	2420	2420	2420	2420
Total width (mm)	2550	2550	2550	2550	2550	2550	2550
Platform height (mm)	1100	1220	1220	1170	1170	1190	1190
Total height (mm)	3080	3100	3070	3070	3070	3170	3040
Wheelbase (mm)	1860	1860	1860	1860	1860	1860	1860
Maximum speed (km/h)	40	40	40	40	40	40	40

* Technical data provided for the standard version with a tolerance of +/- 3%

for more information visit: www.wieltonagro.com.pl

BALE PLATFORMS 3S



TYPES AVAILABLE:

- PR5-3S/S14
- PR5-3S/S18 (SIDE PROTECTION)
- PR5-3S/S24
- PR5-3S/S24S (SIDE PROTECTION)

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- FLOOR EDGE SLOTS FOR BELT ATTACHMENT
- SPIRAL CABLE WITH A SOCKET LOCATED ON THE DRAWBAR
- TOOL BOX
- ABILITY TO MOUNT GALVANIZED POLES
- ANTI-BICYCLE BUMPERS
- LED LIGHTING, WALLS BLOCKADE, FERRY HANDLES
- BRANDED COMPONENTS, NEW TYRES
- 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PR5-3S/S14	PR5-3S/S18	PR5-3S/S24	PR5-3S/S24S
Unladen weight (kg)	4000	5000	4300	5310
Administrative payload (kg)	14000	13000	11000	10700
Number of axles	3	3	3	3
Tire size	300/50-17	405/40R18.5	300/50-17	405/40R18.5
Internal body length (mm)	9000+1110	9000+1110	9000	9000
Total length (mm)	12200+1110	12200+1110	12010	12010
Internal body width (mm)	2430	2430	2430	2430
Total width (mm)	2550	2550	2550	2550
Platform height (mm)	1180	1230	1160	1230
Total height (mm)	3000	3100	3000	3100
Wheelbase (mm)	1800	1800	1800	1800
Maximum speed (km/h)	40	40	40	40

* Technical data provided for the standard version with a tolerance of +/- 3%

for more information visit: www.wieltonagro.com.pl

HALF-PIPE TRAILERS

WIELTON AGRO



TYPES AVAILABLE:



- PRC-2HP/W18R (KONISCH AGRICULTURAL)
- PRC-2HP/W18P (BACKPACK)
- PRC-2HP/W18WB (SIDE DUMPING)
- PRC-2HP/W18B (CONSTRUCTION TRAILER)

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- AUTOMATIC TAILGATE LOCKS
- STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- OLEOPNEUMATIC DRAWBAR SUSPENSION
- BOOGIE SUSPENSION
- AUTOMATIC PARKING BRAKE
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:

WIELTON AGRO

Type	PRC-2 HP18R	PRC-2 HP18WB	PRC-2 HP18P	PRC-2 HP18B
Unladen weight (kg)	7000	7000	7000	7000
Administrative payload (kg)	10000	10000	10000	10000
Number of axles	2	2	2	2
Tire size	385/65R22.5	385/65R22.5	385/65R22.5	385/65R22.5
Internal body length (mm)	7000	6700	7400	6900
Total length (mm)	8810	8740	9400	9320
Internal body width (mm)	2300*	2300	2300	2300
Total width (mm)	2500	2500	2500	2500
Internal body height (mm)	1520	1520	1600	1600
Total height (mm)	2930	3000	3100	3100
Wheelbase (mm)	2100	2100	2100	2100
Maximum speed (km/h)	40	40	40	40
Capacity (m ³)	22	23	26	22

* Technical data provided for the standard version with a tolerance of +/- 30
** Minimum value for body width

for more information visit: www.wieltonagro.com.pl

KONISCH HALF-PIPE TRAILERS



TYPES AVAILABLE:

- PRC-2HPK/W10
- PRC-2HPK/W14
- PRC-2HPK/W16

STRONG POINTS:

- » STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- » SIDE WALLS WITH VARIABLE GEOMETRY FOR EASY UNLOADING
- » REAR STREAMING CHUTE ON WHOLE WIDTH OF LOADING CASE
- » HYDRAULIC DRIVEN TAILGATE
- » STRONG AND DURABLE CHASSIS MADE OF HEAVY-DUTY STEEL
- » TANDEM SUSPENSION
- » BRANDED COMPONENTS
- » NEW TYRES
- » 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PRC-2HPK/W10	PRC-2HPK/W14	PRC-2HPK/W16
Unladen weight [kg]	4000	4700	5000
Administrative payload [kg]	10000	14000	16000
Number of axles	2	2	2
Tire size	285/50R22.5	285/50R22.5	285/50R22.5
Internal body length [mm]	5000	5000	5100
Total length [mm]	7350	7350	8400
Internal body width [mm]	2300**	2300**	2300**
Total width [mm]	2750	2750	2750
Internal body height [mm]	1100	1300	1300
Total height [mm]	2000	2000	2000
Wheelbase [mm]	1900	2000	2000
Maximum speed [km/h]	40	40	40
Capacity [m ³]	12	16.5	20

* Technical data provided for the standard version with a tolerance of +/- 30g
 ** Minimum value for floor width

for more information visit: www.wieltonagro.com.pl

THREE AXEL HALF-PIPE TRAILER



TYPES AVAILABLE:

- PRC-3HP/W25
- PRC-3HP/W25WB (SIDE DUMPING)

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- STABILIZER BOX POSITION
- SUSPENSION BLOCKING WHEN TIPPING
- OLEOPNEUMATIC DRAWBAR SUSPENSION
- TANDEM SUSPENSION
- AUTOMATIC TAILGATE LOCKS
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PRC-3HP/W25	PRC-3HP/W25WB
Unladen weight [kg]	6000	6000
Administrative payload [kg]**	21000	21000
Number of axles	3	3
Tire size	385/55R22.5	385/55R22.5
Internal body length [mm]	8000	8000
Total length [mm]	10200	10200
Internal body width [mm]	2300	2300
Total width [mm]	2500	2500
Internal body height [mm]	1600	1600
Total height [mm]	2980	2980
Wheelbase [mm]	2100	2100
Maximum speed [km/h]	40	40
Capacity [m ³]	24	27

* Technical data provided for the standard version with a tolerance of +/- 3%

** When using a ball hitch

for more information visit: www.wieltonagro.com.pl

VOLUME TRAILER



TYPES AVAILABLE:

- PRC-2/V40

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- SIDE DOOR FOR EASY ACCESS TO THE LOAD BOX
- FRONT FLAP WITH HYDRAULIC CONTROL
- OLEOPNEUMATIC DRAWBAR SUSPENSION
- CAN BE RETROFITTED WITH METERING ROLLERS
- FUNCTIONAL TENSIONING SYSTEM
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY

PARTNERS:



Watch a video of the trailer presentation



*TECHNICAL DATA:

Type	PRC 2/V40
Unladen weight (kg)	7000
Technical payload (kg)	10000
Number of axles	2
Tire size	600/100R16,5
Internal body length (mm)	8000
Total length (mm)	10420
Internal body width (mm)	2500
Total width (mm)	2500
Internal body height (mm)	2020
Total height (mm)	3740
Wheelbase (mm)	2100
Maximum speed (km/h)	40
Capacity (m ³)	40

* Technical data provided for the standard version with a tolerance of +/- 3%



for more information visit: www.wieltonagro.com.pl

DOLLY TROLLEYS



TYPES AVAILABLE:

- PRD-1
- PRD-2

STRONG POINTS:

- STATE-OF-THE-ART CORROSION PROTECTION TECHNOLOGY - KTL
- SAF AXLES
- JOST FIFTH WHEEL
- COMPLETE HYDRAULIC SYSTEM
- H-S VALVE, AUTOMATIC PARKING BRAKE
- AIR SUSPENSION
- BRANDED COMPONENTS
- NEW TYRES
- 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PRD-1	PRD-2
Unladen weight (kg)	2000	2600
Number of axles	1	2
Tire size	415/50R22.5	585/50R22.5
Saddle height (mm)	1210	1280
Total length (mm)	4960	5610
Outer width (mm)	2330	2330
Total height (mm)	1735	1790

* Technical data provided for the standard version with a tolerance of +/- 3%

for more information visit: www.wieltonagro.com.pl

MANURE SPREADER



AVAILABLE MODELS:

- PRC-1/RO14

AVAILABLE MODELS:

- » VERTICAL CYLINDRICAL ADAPTERS
- » FOLDABLE LADDER ALLOWING EASY ACCESS TO THE CARGO BOX
- » AESTHETICALLY AND FUNCTIONALLY PLACED HYDRAULIC LINES ON THE SIDE WALL
- » UNLOADING BARS IN THE SHAPE OF CLOSED PROFILES WORKING WITH CHAIN LINKS OF 16 MM DIAMETER
- » CONTROL PANEL PLACED AT THE FRONT PART OF THE MACHINE
- » HYDRAULICALLY OPENED GATES ALLOWING CONTROL OVER THE WIDTH AND DIRECTION OF MANURE SPREADING
- » BRANDED COMPONENTS
- » NEW TYRES
- » 24-MONTH WARRANTY

PARTNERS:



*TECHNICAL DATA:



Type	PRC-1/RO14
Unladen weight [kg]	6 100 kg
Technical payload [kg]	14000**
Number of axles	1
Tire size	650/15/702
Internal body length [mm]	5 330 mm
Total length [mm]	8 800 mm
Internal body width [mm]	5 815 mm
Total width [mm]	2 925 mm
Internal body height [mm]	1 270 mm
Total height [mm]	3 110 mm
Wheelbase [mm]	2 300 mm
Capacity [m ³]	13,50 m ³ (do 15,00 m ³)***

* Technical data provided for the standard version with a tolerance of +/- 3%

** When using a ball hitch

*** When using wood sideboard extensions

for more information visit: www.wieltonagro.com.pl



TYPES AVAILABLE:

- PRC-2H/12

*TECHNICAL DATA:

Type	PRC 2H/12
Maximum authorized mass	15700
Technical permissible maximum mass	15700
Payload	12000
Unladen weight	3700
Tire size	385-65R22.5
Drawbar eye load	2500
Maximum authorized axle load	6400
Length without container	5985
Length with shortest/longest container	5985/6374
Width without container	2530
Width with container (min/max)	2530/2550
Hook height	1450/1570
Permissible container connection dimensions according to	DIN 30722 / 351821
Total container length (min/max)	4400/4900
Total container width	max 2550
Total container height	max 2900
Wheelbase	1900

* Technical data provided for the standard version with a tolerance of +/- 3%





WIELTON AGRO



Strona 31, data 08.2019 r.

WIELTON AGRO Sp. z o.o.
ul. Rymarkiewicz 6, 98-300 Wieluń
e-mail: kontakt@wieltonagro.com.pl

www.wieltonagro.com.pl